

TECHNICAL SPECIFICATIONS

| | |
|--|-----------------------|
| PRODUCT TYPE | DRYBACK |
| CUSTOMER BRAND NAME | INVIUS 330 |
| THICKNESS (OVERALL THICKNESS / WEAR LAYER THICKNESS) | 3.0mm / 30mil |
| PRODUCT SPECIFICATION (SIZE) | As specified |
| REMARK (COATING, BEVEL ETC.) | EMT Core + EPT Shield |

| THICKNESS | WEAR LAYER | SIZE (NOM.) | SF/BOX | PCS/BOX | BOX/PLT SF/PLT | PALLET/TRUCK SF/TRUCK | LB/BOX | PALLET DIMS |
|-----------|--------------|-------------|--------|---------|-----------------|-----------------------|--------|----------------|
| 3MM | .7MM (30MIL) | 7" x 48" | 35 | 15 | 50 Box 1,750 sf | 22 Pallet 38,500 sf | 37.5 | 50" x 40" x 6" |
| 3MM | .7MM (30MIL) | 12" x 24" | 36 | 18 | 48 Box 1,728 sf | 23 Pallet 39,744 sf | 38.2 | 50" x 40" x 6" |
| 3MM | .7MM (30MIL) | 18" x 18" | 36 | 16 | 40 Box 1,440 sf | 27 Pallet 38,880 sf | 38.1 | 38" x 40" x 6" |
| 3MM | .7MM (30MIL) | 24" x 24" | 38.75 | 10 | 40 Box 1,550 sf | 26 Pallet 40,300 sf | 36.43 | 50" x 25" x 6" |

| STANDARD | TEST ITEM | TEST METHOD | REQUIREMENT | PERFORMANCE |
|--------------------------------|-------------------------|------------------------------------|---------------------------------|---------------------|
| ASTM F1700 (CLASS III, TYPE B) | Dimensions | ASTM F2421 | ± 0.016 in./lin.ft | Meet |
| | Squareness | ASTM F2055 | Max 0.010 in. (0.25mm) | Meet |
| | Overall thickness | ASTM F386 | As specified ±0.005in. (0.13mm) | Meet |
| | Wear layer thickness | ASTM F410 | 30mil | Meet |
| | Dimensional Stability | ASTM F2199 | Max 0.020 in./lin.ft | Meet |
| | Flexibility | ASTM F137 | 1in mandrel, no crack or break | Meet |
| | Resistance to chemicals | ASTM F925 | No more than a slight change | Meet |
| | Resistance to light | ASTM F1515 | ΔE < 8 ave MAX | Meet |
| | Resistance to heat | ASTM F1514 | ΔE < 8 ave MAX | Meet |
| Others | Residual Indentation | ISO 243431 | ≤0.1mm | Meet |
| | Static load limit | ASTM F970 | Min 0.005 in or less @ 250 psi | Meet |
| | SCOF (Slip Resistance) | ASTM D2047 | More than 0.6 | Meet |
| | Indoor Air Quality | CDPH/EHLB Standard Method v1.22017 | LOW VOC | FLOORSORE Certified |



NO WAX



ANTIBACTERIAL



DIMENSIONAL STABILITY



SCRATCH RESISTANCE



STAIN RESISTANCE



EASY MAINTENANCE



INVIUS™
INNOVATIVE
PERFORMANCE



STONECROP 44703 + BRINDLE 44708



INVIUSFLOORING.COM



330
Wood & Stone



MADE IN USA



**Durable by Design.
Made in the USA.
Ready for What's Next.**

SEAWORN 57304

INVIUS 330 is engineered for today's toughest commercial environments – delivering rugged performance, easy maintenance, and stylish looks for Healthcare, Corporate, Retail, and more.

- ✓ **3mm Thick:**
Adds stability while matching existing VCT and other resilient flooring installations – eliminating transition problems and masking minor subfloor imperfections.
- ✓ **30 Mil Wear Layer:**
50% greater wear layer than most LVTs. Delivers superior durability and a longer wear life – ideal for busy spaces that need to look good and perform for years to come.
- ✓ **Made in the USA:**
Manufactured entirely in the U.S. – ensuring dependable quality and faster, more reliable fulfillment.
- ✓ **Fiberglass Reinforced EMT Core:**
Multi-layered construction features a fiberglass layer for industry-leading dimensional stability.
- ✓ **EPT Shield:**
Guards against scratches, stains, and chemicals – no waxes, polishes, or sealants needed. Built-in antibacterial protection supports cleaner environments.
- ✓ **Eco-Friendly & FloorScore® Certified:**
Made with low-VOC, environmentally responsible materials that support healthier indoor air quality.
- ✓ **Natural Design Options:**
Available in a wide range of wood plank and stone patterns to enhance modern Healthcare, Corporate, and Retail spaces.
- ✓ **Low-Maintenance Simplicity:**
 - Occupancy-ready
 - No stripping, waxing, or sealing
 - Fast, cost-effective repairs






WOOD

Beauty That's Engineered To Endure.

CHARACTER OAK

3MM | 7" x 48" PLANK | 30 MIL

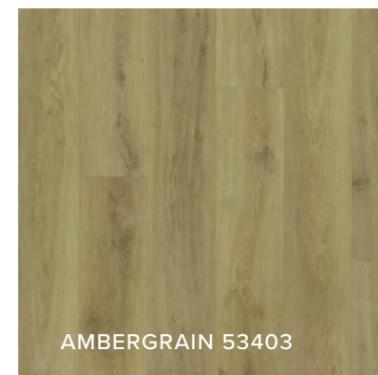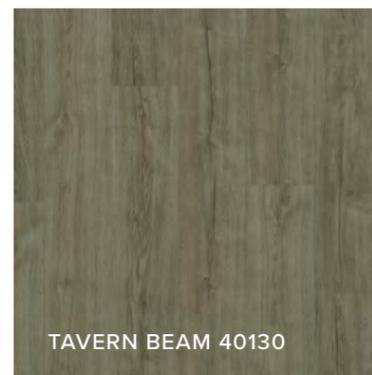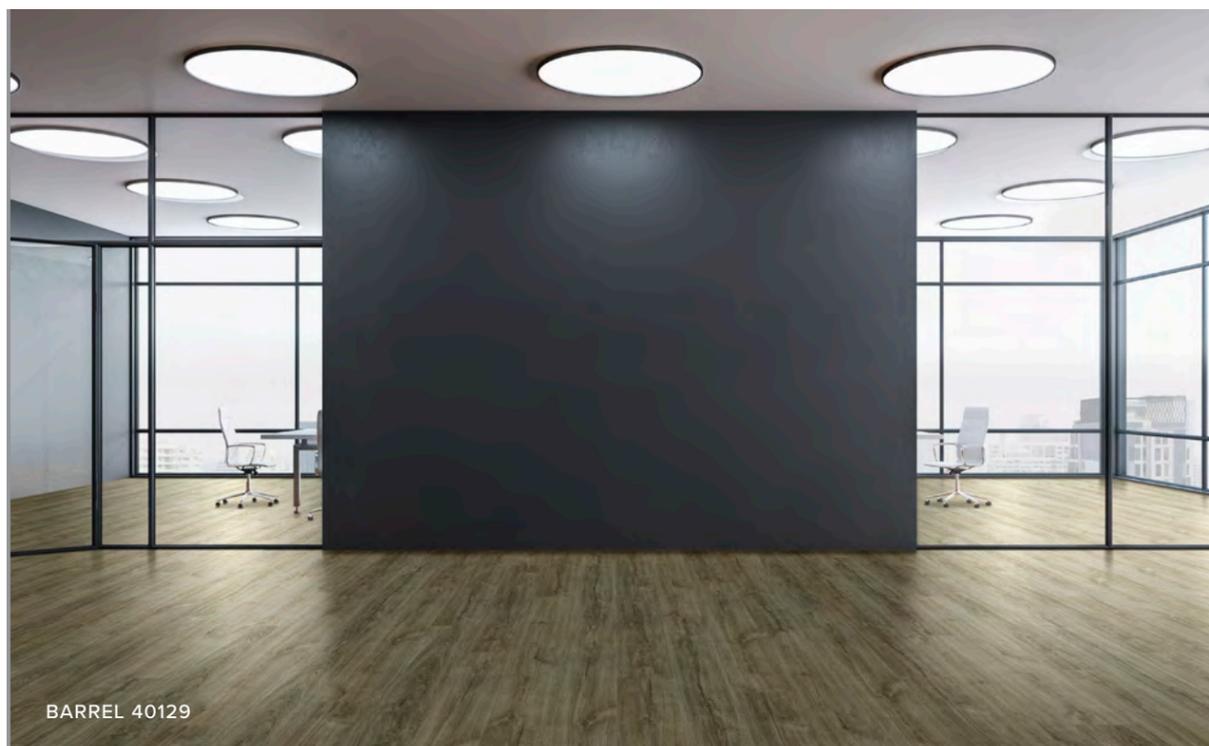

WOOD

CLEAN OAK


3MM | 7" x 48" PLANK | 30 MIL



HONEYCUT 55719



FAWNLINE 45520

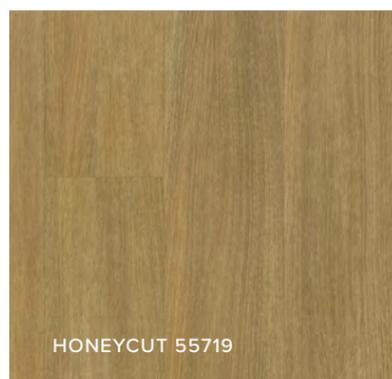


HONEYCUT 55719




GREYMILL 55721

WALNUT

3MM | 7" x 48" PLANK | 30 MIL

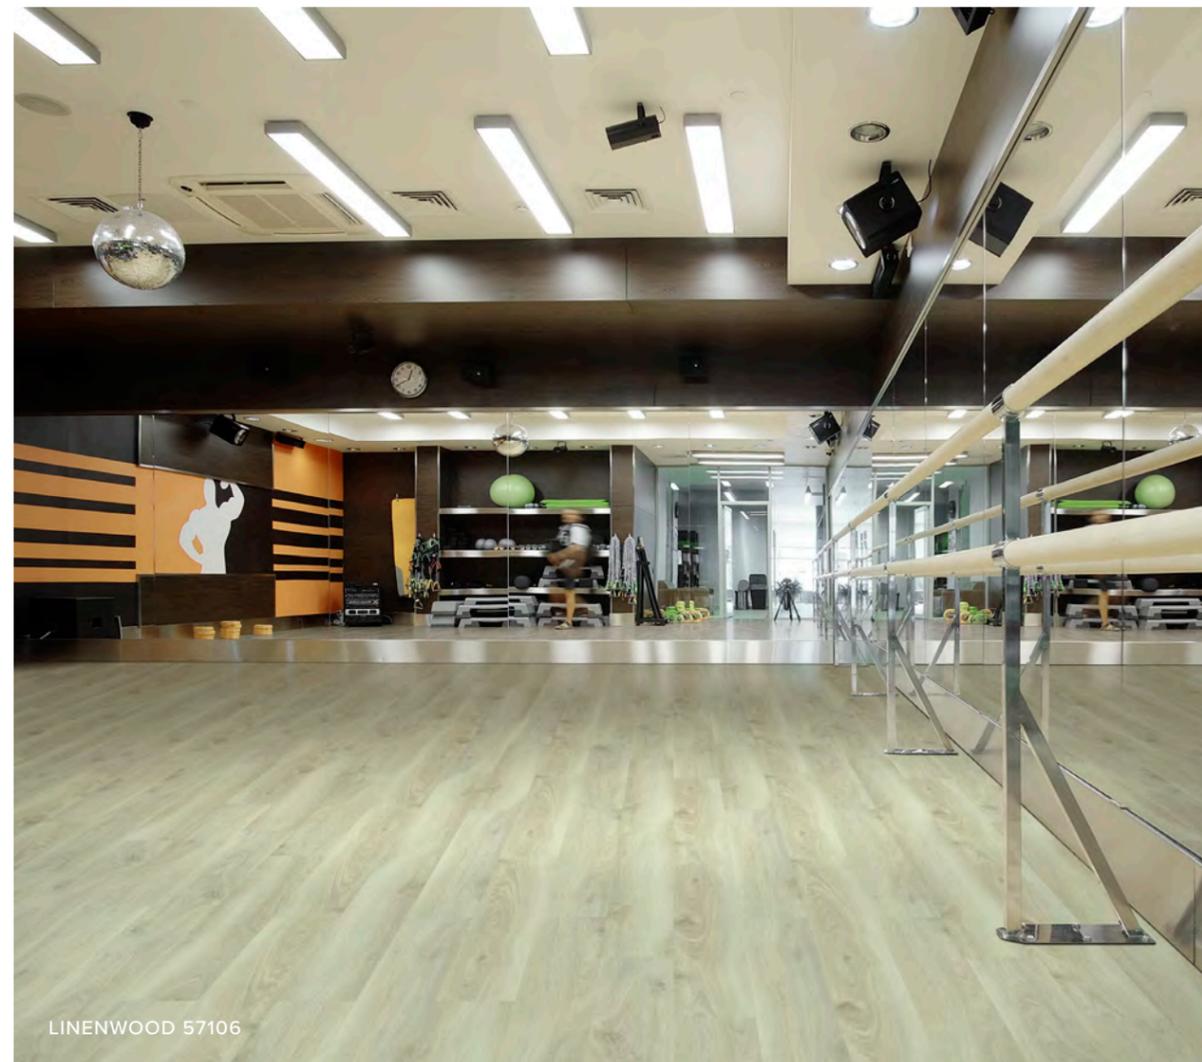

LINENWOOD 57106

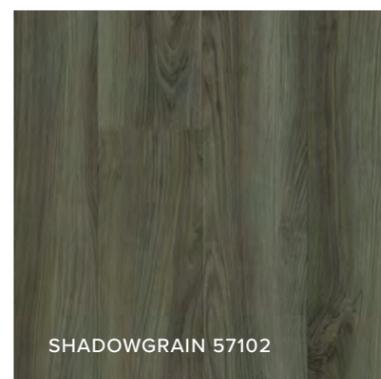

SHADOWGRAIN 57102



LINENWOOD 57106



SADDLE CUT 43720

STONE

**Sleek. Timeless.
Built to Withstand.**



DUNELIGHT 57302



CARAWAY 44710 + GREYMILL 55721

TRAVERTINE

3MM | 24" x 24" TILE | 30 MIL




DUNELIGHT 57302



SEAWORN 57304

TERRAZZO

3MM | 24" x 24" TILE | 30 MIL

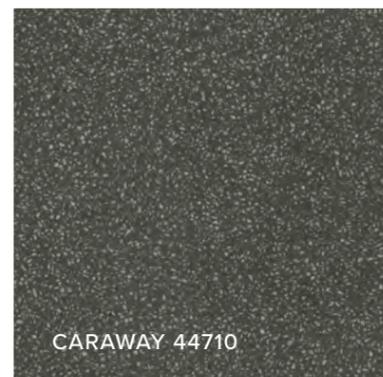

CARAWAY 44710



STONECROP 44703



BRINDLE 44708

STONE

CONCRETE 3MM | 12" x 24" TILE | 30 MIL



DOVESTONE 42508



FORGE 42504




DOVESTONE 42508

MARBLE 3MM | 12" x 24" TILE | 30 MIL



VEILSTONE 56603 + NIGHTGRAIN 56602

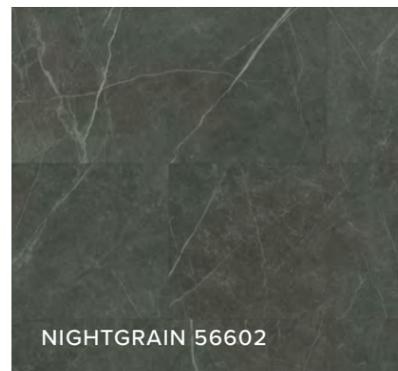

NIGHTGRAIN 56602




VEILSTONE 56603

STONE 3MM | 18" x 28" TILE | 30 MIL



SANDLEGE 50506 + WHITECLIFF 50508

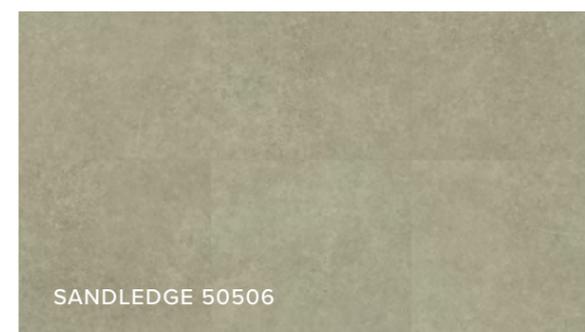

SANDLEGE 50506



WHITECLIFF 50508